



### CDX1-1747

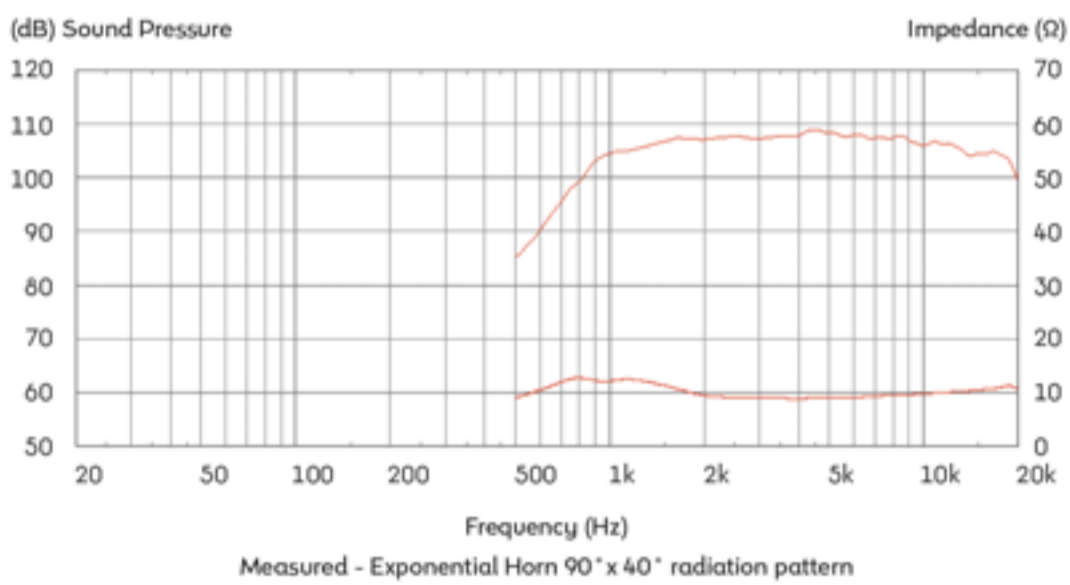

- 2,000Hz recommended min. crossover freq (12dB/oct)
- Single piece polyimide diaphragm and surround
- Sound Castle soft clamping diaphragm assembly
- Flange (CDX1 - 1747) and screw (CDX1 - 1748) fitting versions available

#### 8 Frequency Response

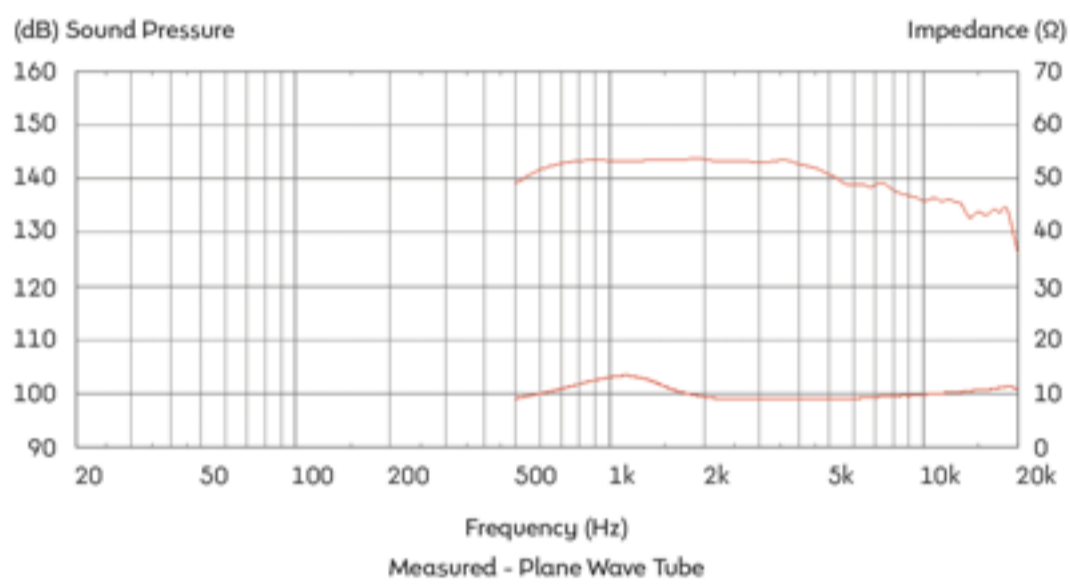

1. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Rating is defined as 3dB greater than the AES rating.
3. Measured on axis at 1W, 1m, using typical horn, in 2Ā anechoic environment.

#### General Specifications

Power rating <sup>1</sup>	60Wrms
Continuous power rating <sup>2</sup>	120W
Nominal impedance	8
Frequency range	1000-20,000Hz
Sensitivity <sup>3</sup>	110dB
Recommended min. crossover (12dB/oct)	2,000Hz 12dB/oct
Voice coil diameter	44mm/1.75in
Voice coil material	Edgewound Copper Clad Aluminium
Magnet type	Ferrite
Diaphragm material	Polyimide
Surround material	Polyimide

#### Mounting Information

Width	120mm/4.7in
Depth	53mm/2.1in
Weight	2.3kg/5.1lb
Fitting	Flange (2 /3 M6 holes on 76/57mm, ., 3.0/2.24in PCD
Throat exit	25mm/1.0in

#### Packed Dimensions & Weight

Single pack size W x D x H	140mm x 170mm x 70mm /5.5in x 6.7in x 2.8in
Single pack weight	3kg/6.6lb
Multi pack size W x D x H	430mm x 370mm x 90mm
Multi pack weight	14kg/30.8lb