



ST 728

Supreme Tweeter, Ø 72mm, 8Ω

Features:

- * Underhung voice coil
- * Large Hexatech™ aluminum voice coil
- * 72mm IDR™ Improved Dispersion Recess aluminum face plate
- * Replaceable Acuflex™ dome / coil assembly
- * Neodymium flat pancake design magnet
- * High power handling



SPECIFICATIONS

General Data

Overall Dimensions	DxH	72mm(2.83")x53mm(2.08")
Nominal Power Handling (DIN)	P	120W
Transient Power 10ms		1,000W
Sensitivity 2.83V/1M		91dB SPL
Frequency Response		See graph
Dome Material		Acuflex™ hand coated soft dome
Net Weight	Kg	0.21

Electrical Data


Nominal Impedance	Z	8Ω
DC Resistance	Re	5.2Ω
Voice Coil Inductance @ 1KHz	LBM	0.05mH

Voice Coil and Magnet Parameters



Voice Coil Diameter	DIA	28mm
Voice Coil Height		2.7mm
HE Magnetic Gap Height	HE	4.6mm
Max. Linear Excursion	X	0.95mm
Voice Coil Former		Aluminum
Voice Coil Wire		Hexatech™ Aluminum
Number Of Layers		2
Magnet System Type		Neodymium Flat Pancake
B Flux Density	B	
BL Product	BXL	

T-S Parameters

Suspension Compliance	Cms	
Mechanical Q Factor	Qms	0.8
Electrical Q Factor	Qes	0.65
Total Q Factor	Qts	0.36
Mechanical Resistance	Rms	
Moving Mass	Mms	0.44 g
Eq. Cas Air Load (liters)	VAS	
Resonant Frequency	Fs	800 Hz
Effective Piston Area	SD	6.0 cm ²

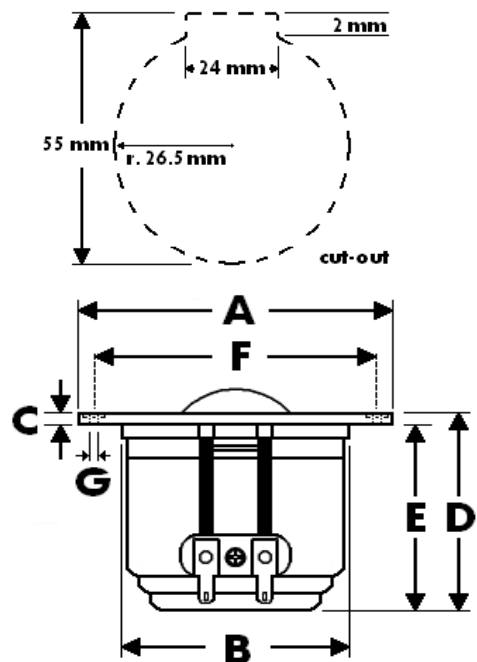

A - Overall diameter	72mm
B - Magnet/Chamber diameter	53mm
C - Flange thickness	3mm
D - Overall height	53mm
E - Magnet/Chamber depth	50mm
F - Mounting holes location diameter	64mm
G - 6 Mounting holes, at 60° interval, inner hole diameter	Ø 3.7mm
pocket	h 1mm, Ø 7mm

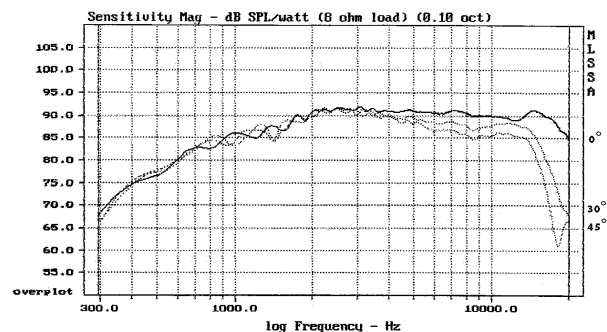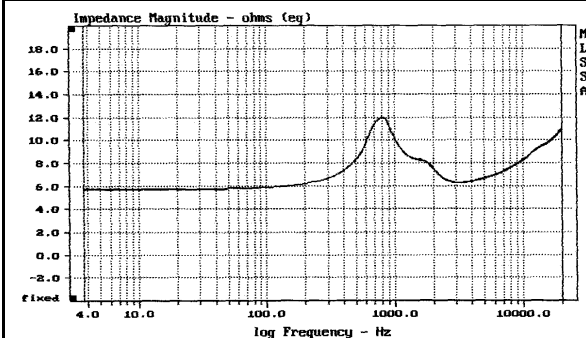

Measured on IEC baffle using Bruel & Kjaer 3144 model microphone. Also available in black faceplate finish.

Morel operate policy of continuous product design improvement, consequently specifications are subject to alteration without prior notice.